
Default configuration to use ANPR cameras with Leader and Leader Mini controllers.

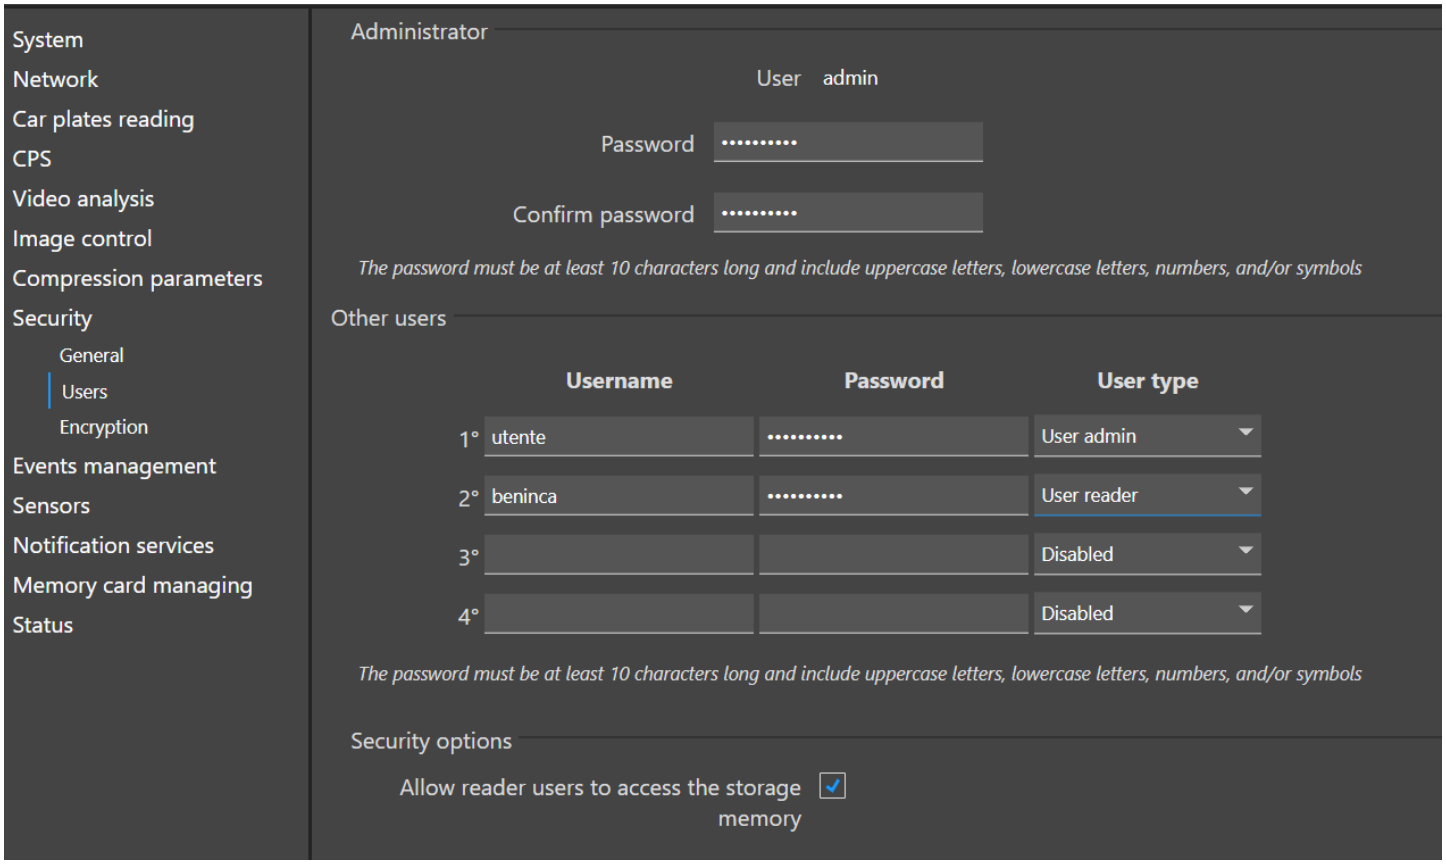

When we ship devices to be paired with Leader (Mini), we usually set these passwords:
admin
*****
(please, do not change this one unless even the controller match the same)

Another administrator:
utente
rfid2025@selea


Low level user:
Username: beninca
Password: beninca@26

APROMIX RFID S.r.l.
Contrà San Giorgio 148 - 36061
Bassano del Grappa -VI- ITALY
Tel. +39 0424 502466
Fax +39 0424 500977

P.IVA 03883140240
REA VI-361901
Cap.Sociale 150.000 € I.V.

© APROMIX RFID S.r.l. - All rights reserved

IP notification:

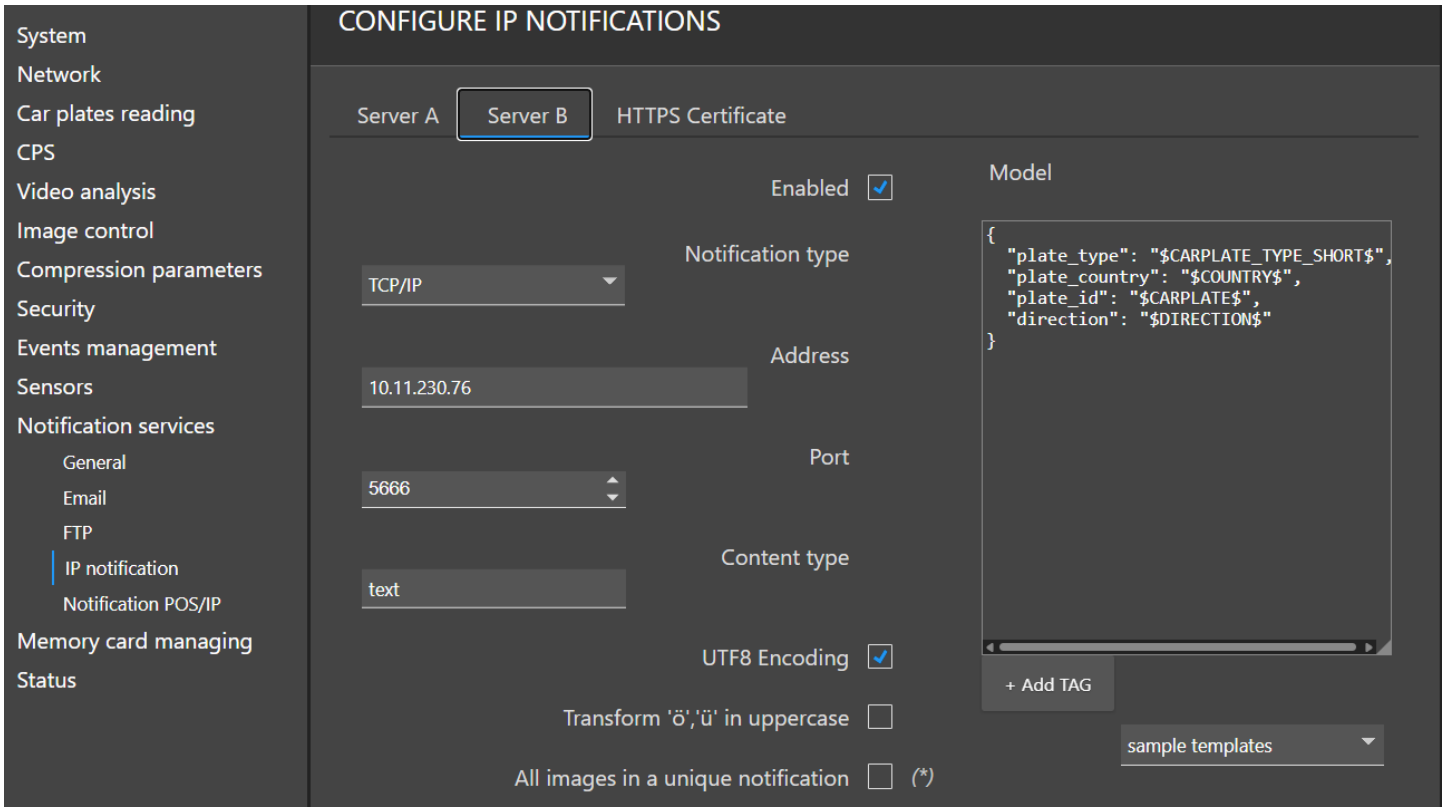

Enable the camera to send plate read to the controller.

	Leader SC or Leader QC	Leader Mini
	Server A or Server B	
Notification type	TCP/IP	
Address	Leader's address (main interface)	192.168.199.254 (reader's interface)
Port	5666	
Content type	text	
UTF8 encoding	True	
Model[1]	{ "plate_type": "$CARPLATE_TYPE_SHORT$", "plate_country": "$COUNTRY$", "plate_id": "$CARPLATE$" }	

[1] Some info can be optionally added

APROMIX RFID S.r.l.
Contrà San Giorgio 148 - 36061
Bassano del Grappa -VI- ITALY
Tel. +39 0424 502466
Fax +39 0424 500977
P.IVA 03883140240
REA VI-361901
Cap.Sociale 150.000 € I.V.

© APROMIX RFID S.r.l. - All rights reserved

From Leader (Mini)'s interface, it's also possible to find and change camera address.
For Mini version, these are the pre-defined settings:

PLATE Reader – IN

Terminal ID:	8
Description:	PLATE Reader – IN
Group:	ANPR (Automatic Number Plate Recognition)
Address:	0
Concentrator:	192.168.199.106 • PLATE Reader – IN
Origin area:	External
Destination area:	External
Neutral about destination:	×

PLATE Reader – OUT

Terminal ID:	9
Description:	PLATE Reader – OUT
Group:	ANPR (Automatic Number Plate Recognition)
Address:	0
Concentrator:	192.168.199.107 • PLATE Reader – OUT
Origin area:	External
Destination area:	External
Neutral about destination:	×

APROMIX RFID S.r.l.
Contrà San Giorgio 148 - 36061
Bassano del Grappa -VI- ITALY
Tel. +39 0424 502466
Fax +39 0424 500977

P.IVA 03883140240
REA VI-361901
Cap.Sociale 150.000 € I.V.

© APROMIX RFID S.r.l. - All rights reserved