


# BikeRepair - Tool Replacement



## Step 1

- Remove top plate

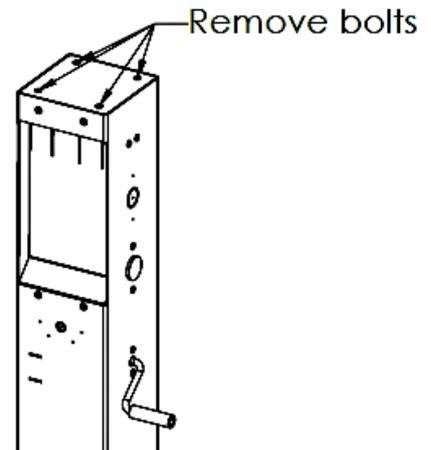


## Step 2

- Remove upper plate (*be careful not to lose the plastic spacers*)
- Pull weights out of guiding tubes

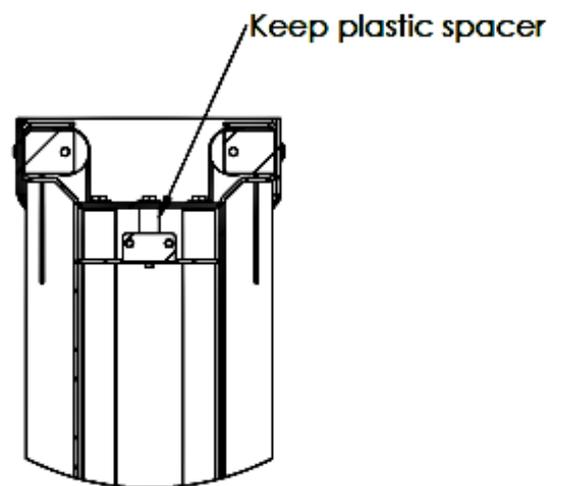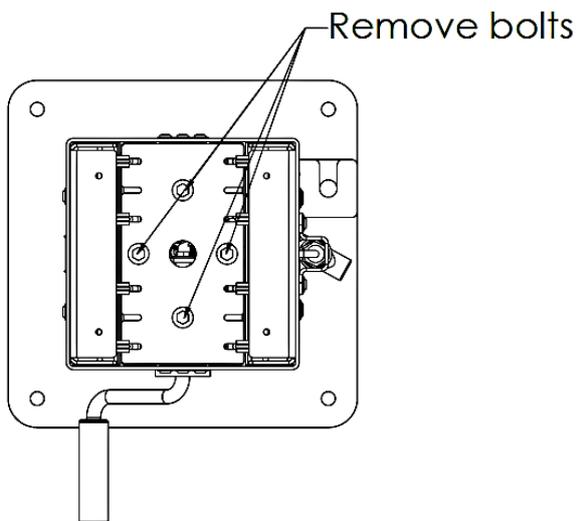


## Step 3

- Remove broken cable from the counterweight

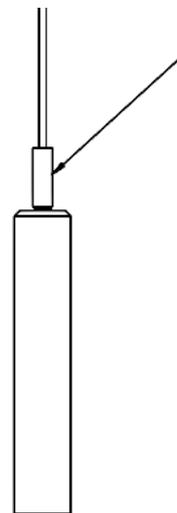


## Step 4

- Loosen bolts holding the lower plate (*these bolts don't need to be removed*)
- Remove side panel

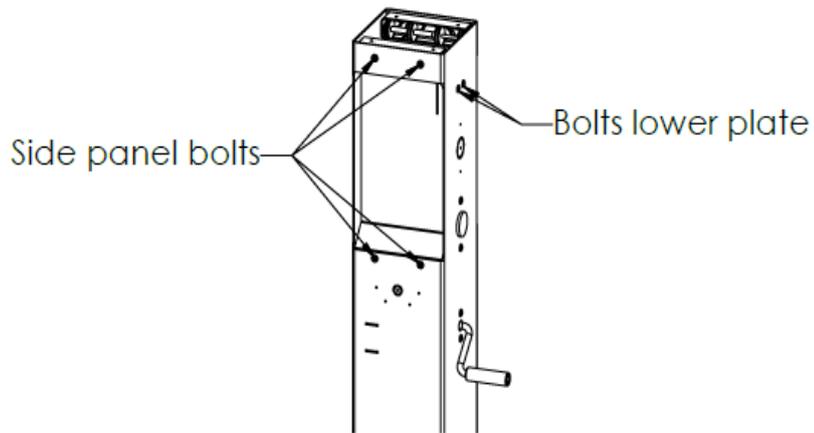

## Step 5

- Enter cable thru marked holes in side panel
- Connect new tool(s) to counterweight(s)

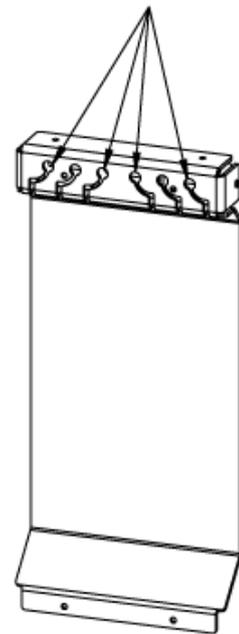

## Step 6

- Replace side panels
- Tighten lower plate bolts
- Place the plastic spacers before installing the upper plate
- Replace the top plate

