

## DATA SHEET

### Product line



**Mobile**



**Classification**



### Additional functions with corresponding equipment



**Painting in RAL to choose**

## OktaBlock

The mobile vehicle barrier OktaBlock secures driveways and access to open-air events and effectively prevents vehicles from smashing through.

- Completely assembled single barrier for easy installation without on-site structural work
- Can be used as a single module thanks to certification Modules do not have to be connected
- Flexible, location-independent, cost-efficient, maintenance-free
- Can be used as a notice or advertising space on request




### Technical data

<b>Version</b>	Mobile
<b>diameter</b>	273 mm
<b>Base plate dimensions</b>	800 × 800 mm
<b>Height</b>	1250 mm
<b>Base plate height (chamfered)</b>	5 – 33 mm
<b>material thickness</b>	16 mm
<b>Cylinder infill</b>	Concrete
<b>Weight</b>	approx. 350 kg
<b>Impact energy with destruction</b>	750,000 J
<b>Certified according to</b>	PAS68, IWA14-1, ASTM M30, K4

Equipment		Function
Cylinder surface	Steel S 355	●
Surface treatment	Steel version: steel coated (Anthracite grey)	●
Eyebolt M20 incl. sling rope	Transport aid for lifting the OktaBlock	●
Reflecting strips	Improved visibility at night, all-round	●
Placement case	Tools for marking positions, compensating for uneven subsurfaces and additional spare screw plugs	○
Maintenance case	Spare warning marks, sling rope and spray paint for repairing surface damage	○
OktaMover	For quick and easy placement and relocation without a forklift, crane or similar. With a warning light and individual battery as standard.	○
Aluminium case for OktaMover	Suitable as a storage aid for storing tools or for use as a placement case or maintenance case.	○
Universal adapter for fastening standard construction site lights	Adapter for fastening all conventional construction site lights with mounting bracket to the head of the OktaBlock / OktaBlock TR. Max. weight of light 1.2 kg.	○
Warning light for OktaBlock / OktaBlock TR	Signal lamp MonoLight LED flashing / permanent light, double-sided yellow, automatic dimming, without batteries. Note: Hörmann adapter and battery unit required.	○
Battery unit for warning light	Premium battery for warning light with high-quality LEDs with long service life. Operating time with one battery – permanent light 1400 hours / flashing light 5500 hours.	○

● Standard ○ Optional

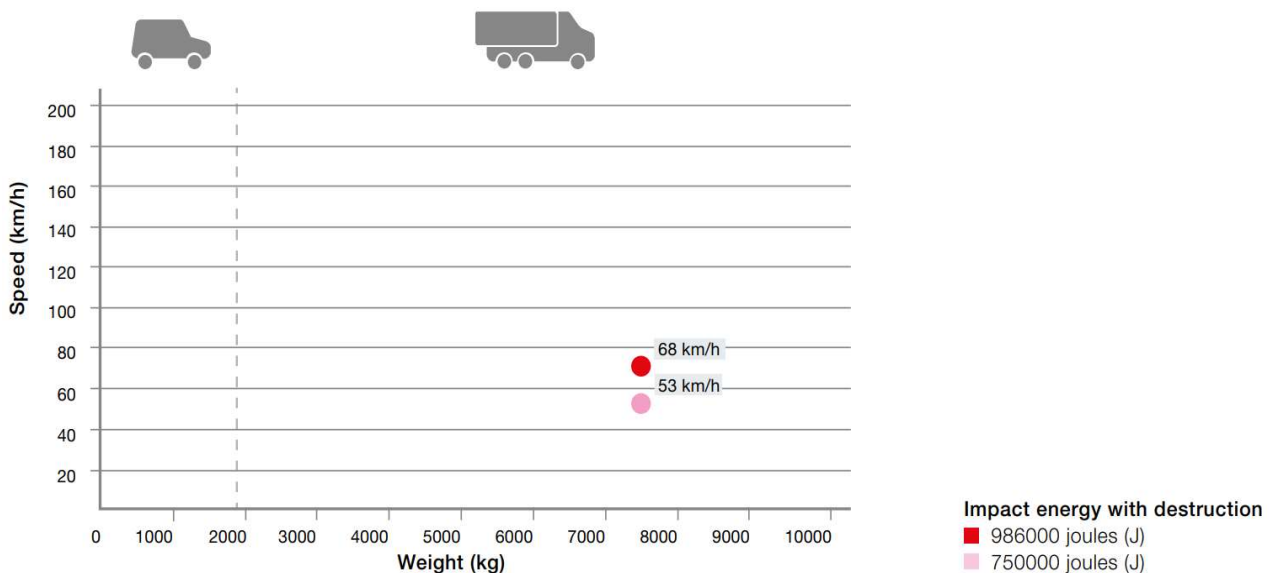

The information above, in particular the specifications and illustrations, are not binding and do not constitute an agreement on quality or a guarantee. Changes and errors are expressly reserved. The data sheet is subject to copyright. No part may be reproduced without our prior permission.