

The 2ParkUp is a user-friendly and flexible double-tier bicycle rack that efficiently doubles bicycle parking capacity. The system has a modular design and is easy to expand, suitable for both indoor and outdoor applications, and quick to assemble. Thanks to the integrated gas spring, robust construction, and low-maintenance design, the 2ParkUp offers a sustainable and future-proof solution for any location.



USP'S 2PARKUP:


- Minimal force required thanks to integrated gas spring.
- Low lifting height of 37 cm; the front wheel hardly needs to be lifted.
- Easy operation with double handles.
- Bicycles remain securely in place (no rolling or falling).
- All positions equipped with tie-down points.
- Suitable for tire widths up to 66 mm (bottom) and 58 mm (top).
- All protruding parts safely covered.
- Bottom positions optionally with front fork support.

VARIANTS:

- Single- or double-sided configuration possible.
- Modular system, easy to expand.
- Single-sided: 4, 8, 12, or 16 bicycle spaces.
- Double-sided: 8, 16, 24, or 32 bicycle spaces.
- Available with center-to-center distances of 375, 400, 450, 500, and 600 mm.

EXTRA OPTIONS:

- Powder coating.
- Charging points for e-bikes.
- Additional tie-down facilities.
- Non-standard quantities.

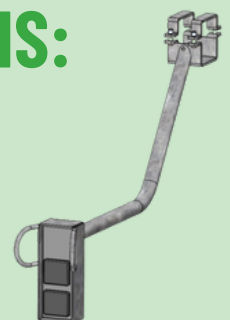

BICYCLE DIMENSIONS:

Tire width:

- Bottom: Max. recommended tire width 66 mm.
- Top: Max. recommended tire width 58 mm.

Wheel size:


- Recommended wheel size: 26"-29".

Bike weight:

- For optimal use 25 kg, maximum 30 kg.

Handlebars:

- Top: Max. handlebar height (A1+A1) 1250 mm.
- Bottom: Max. handlebar height center (A2) 1180 mm / max. handlebar height outside (A1) 1250 mm.
- Handlebar width: 670 mm with a center-to-center distance of 400 mm.

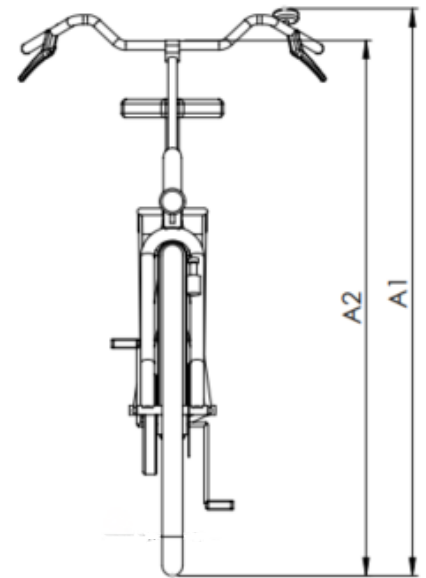


2PARKUP DIMENSIONS:

Ceiling height:


- Depending on the bicycles used, 2750 mm (recommended dimension, see chart on page 3).

Aisle width:

- Recommended 2100 mm. A narrower aisle width is possible, but reduces the user-friendliness of the system.

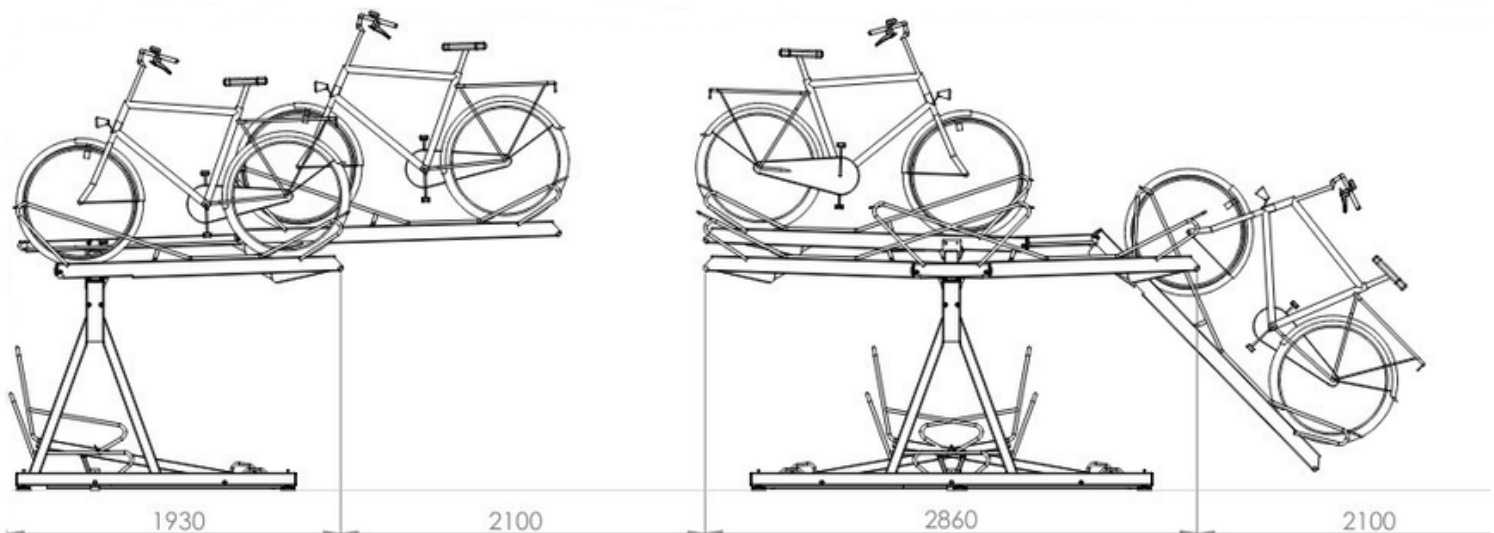

2PARKUP CEILING HEIGHT

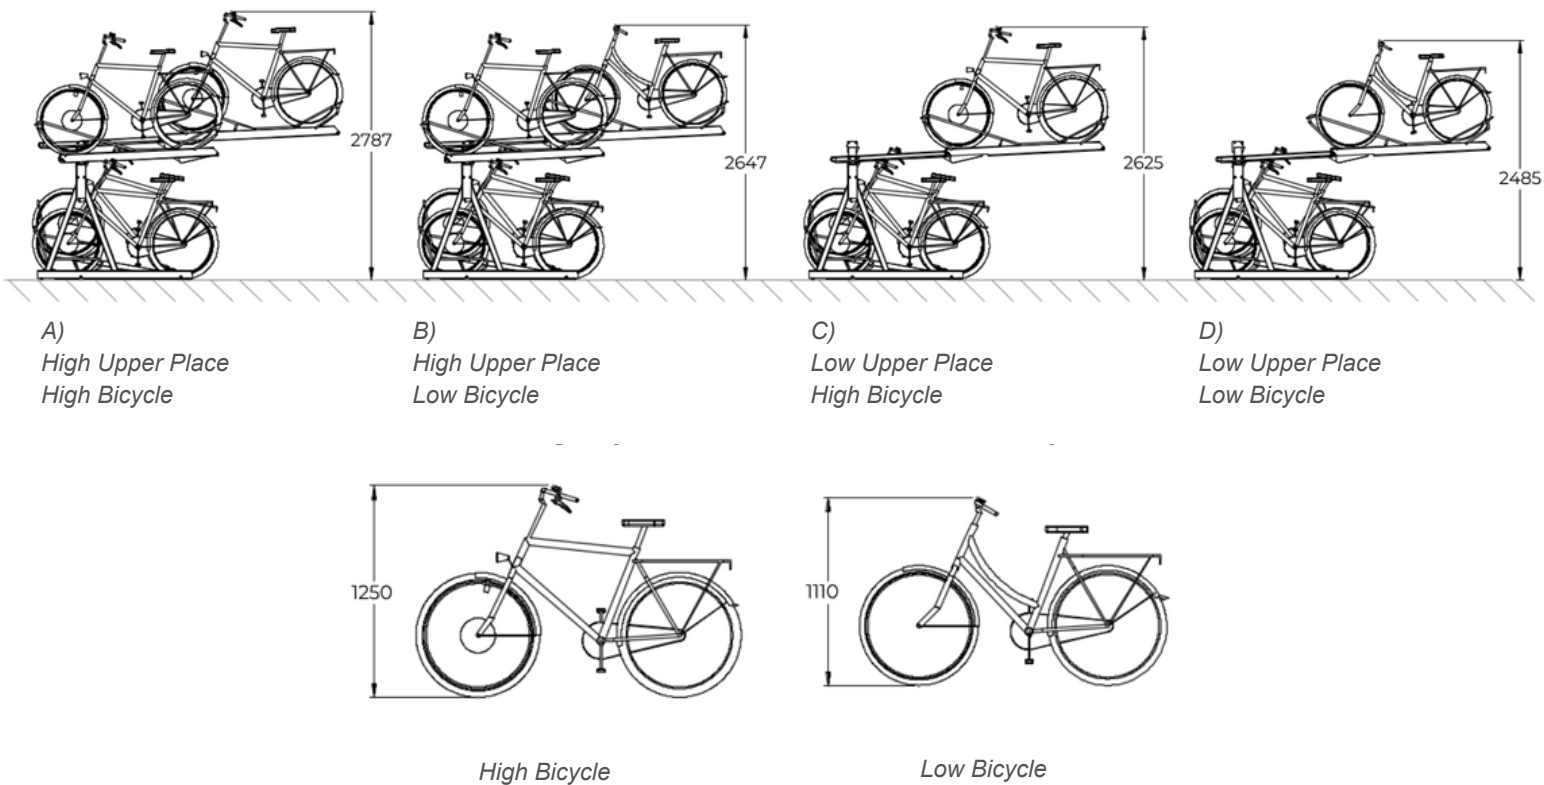

MINIMUM REQUIRED CEILING HEIGHT

**with adjustable legs in the low position*

