

# B4040 55



## ENERGY TOWERS

The semiautomatic PILOMAT ENERGY B4040 55 towers are designed to provide complementary services such as electricity and telephone communications, compressed air and water. They are used in those places typically used for parking or pedestrian areas, and sometimes used as market areas and places for events, concerts and similar. The use of PILOMAT ENERGY B4040 55 prevents the laying of cables and tubes, guaranteeing greater security for its users. Current models are the result of the dedication of more than 40 years in the field of access control, and a twenty-year specialization in bollards.

### GENERAL FEATURES

The B4040 55 PILOMAT ENERGY towers, at semiautomatic movement, allow for multiple installations of single-phase and/or three-phase 16A, 32A, and 63A, in accordance with EN 60301-1 EN 60301-2 regulations and related protective circuit breakers. The coverplate at the top of the movement tower is in compliance with UNI EN 124 regulations with load class D400.



PAG.1/2

**PILOMAT**

100% MADE IN ITALY




PILOMAT s.r.l.  
www.pilomat.com / pilomat@pilomat.com  
Via Zanica 17/p, 24050, Grassobbio (BG) Italy  
Tel. +39.035.29.72.20  
Copyright 2016© Pilomat S.r.l. All rights reserved

B4040 55\_DATASHEET.16      REVIEW      05/05/2016

## OPTIONAL ITEMS

PILOMAT ENERGY B4040 55 IN NORMAL STEEL PAINTED - COVERPLATE 40.000 Kg
PILOMAT ENERGY B4040 55 IN NORMAL STEEL PAINTED - FILLABLE COVERPLATE 40.000 Kg
PILOMAT ENERGY B4040 55 IN STAINLESS STEEL PAINTED - COVERPLATE 40.000 Kg
PILOMAT ENERGY B4040 55 IN STAINLESS STEEL PAINTED - FILLABLE COVERPLATE 40.000 Kg
PIT IN FE370 STEEL FOR ENERGY TOWER B4040 55
PIT IN AISI304 STAINLESS STEEL FOR ENERGY TOWER B4040 55
WATERPROOF PIT IN AISI304 STAINLESS STEEL FOR ENERGY TOWER B4040 55
WATERPROOF PIT IN AISI304 STAINLESS STEEL FOR ENERGY TOWER B4040 55 - WITH IMMERSION PUMP
KIT 5 STANDARD KEYS FOR PILOMAT ENERGY
ELECTRIC CONFIGURATION DEGREE IP67 (AS AN ALTERNATIVE TO IP66)
TELEPHONE CONFIGURATION RJ45 IN HOUSING IP55 - CONNECTION LINE LENGTH 3m
WATER CONFIGURATION - WATER TAP WITH QUICK CONNECTION - FLEXIBLE TUBE LENGTH 3m
COMPRESSED AIR TAP WITH QUICK CONNECTION - FLEXIBLE TUBE LENGTH 3m
SOCKET INTERBLOCC IEC309 230V 16A 2P+T - IP 66 WITH MAGNETOTHERMIC SWITCH 1P+N 16A 6KA
SOCKET INTERBLOCC IEC309 230V 16A 2P+T - IP 66 WITH MAGNETOTHERMIC SWITCH 1P+N 16A 6KA
SOCKET INTERBLOCC IEC309 230V 32A 2P+T - IP 66 WITH MAGNETOTHERMIC SWITCH 1P+N 32A 6KA
SOCKET INTERBLOCC IEC309 230V 63A 2P+T - IP 66 WITH MAGNETOTHERMIC SWITCH 1P+N 63A 6KA
SOCKET IEC309 400V 16A 3P+N+T - IP 66 WITH MAGNETOTHERMIC SWITCH 4P 16A 6KA
SOCKET INTERBLOCC IEC309 400V 16A 3P+N+T - IP 66 WITH MAGNETOTHERMIC SWITCH 4P 16A 6KA
SOCKET INTERBLOCC IEC309 400V 32A 3P+N+T - IP 66 WITH MAGNETOTHERMIC SWITCH 4P 32A 6KA
SOCKET INTERBLOCC IEC309 400V 63A 3P+N+T - IP 66 WITH MAGNETOTHERMIC SWITCH 4P 63A 6KA
CONNECTION CABLE 5G4 INSTALLED INSIDE PILOMAT ENERGY B4040 - LENGTH 3m

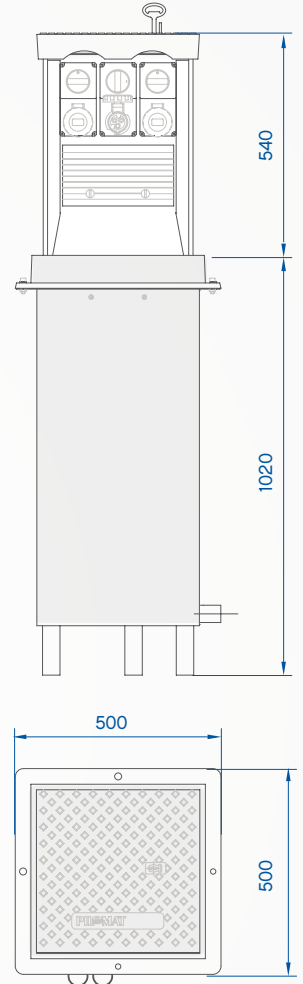

MOVING TOWER	FE370 NORMAL STEEL - AISI304 STAINLESS STEEL
MOVING TOWER DIMENSION	400x400mm
MOVING TOWER HEIGHT	550mm
MOVING TOWER FINISH	POLYESTER POWDER PAINT - STANDARD YELLOW
CONNECTION LINE OUT OF THE TOWER	STANDARD 3m
PROTECTION CLASS OF ELECTRIC COMPONENTS	IP66-IP67
LOAD CLASS	D400
POSSIBILITY OF FILLABLE COVERPLATE	YES - 40mm