



ROMEO RACK



Product benefits :

- Reduced spacing between bikes
- Securing the bike

Option :

- Unilateral or bilateral



TECHNICAL DATA SHEET



Dimensions :

Length : 1400 mm

Depth: 600 mm

Height : 885 mm



ROMEO RACK

Cycle stand

Civil engineering costs borne by client

1 year, parts and labour guarantee, excluding vandalism, accident, or storm (wind >130 km/h)

CONSTRUCTION


- Galvanized steel tube structure
- Bicycle grip steel tube diameter 50 mm
- Profile ground mounting galvanized steel 2.5 mm thick
- Cycling Guide galvanized sheet thick. 3 mm
- Maintenance bike lane steel, diameter 12 mm

FIXATIONS

- Fixing by M12/65 anchor bolts into concrete slab or concrete blocks
- Chemical resin fixing with 2 M12/120mm studding on 7 cm thick asphalt

FINITION

- Galvanized
- Heat cured polyester paint baked at 200°C, insensitive to UV in **option**
- Choice of colours from the RAL range or in the Abri Plus selection of trendy colours

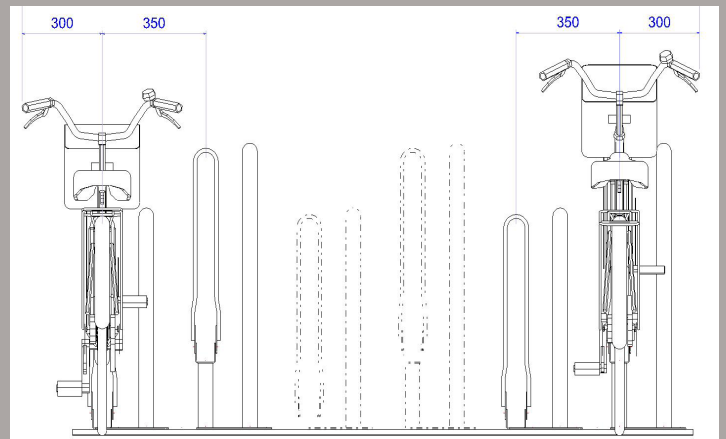

Other dimensions possible,
For customised quotations and designs,
contact our sales department on :

Tel : +332 40 32 51 60

Groupe ABRI PLUS

31 rue de l'industrie
44310 St Philbert de Grand Lieu
FRANCE